

## Acoustic Window

**Sound Insulation****R<sub>w,P</sub> 52 dB****tested acc. to EN ISO 10140-2**

### Optional Audited Additional Functions

- Fire Protection	<b>EI<sub>230</sub> / F30 to EI<sub>290</sub> / F90</b>	tested acc. to EN 1363-1
- Burglar Protection	<b>RC2 / RC3 / RC4</b>	tested acc. to EN 1627
- Impact Resistance	<b>P1A to P5A</b>	tested acc. to EN 356
- Penetration Resistance	<b>P6B to P8B</b>	tested acc. to EN 1063
- Bullet Resistance	<b>FB4-NS to FB7-NS</b>	tested acc. to EN 1522
	<b>BR1-NS to BR7-NS</b>	tested acc. to EN 1063
- Blast Resistance	<b>up to 20 kPa</b>	tested acc. to EN 13124-1
- Explosion Resistance	<b>ER1-NS to ER4-NS</b>	tested acc. to EN 1522
- Explosion Protection	<b>up to zone 1/21</b>	acc. to EN 1127-1 or ATEX 2014/34/EU

### Range of Dimension

**Width from 400 mm to 4000 mm****Height from 400 mm to 2000 mm**

### Technical Specification and Tender Text

<b>Product:</b>	<b>SFB acoustic window</b> <b>brand Buchele tested acc. to EN ISO 10140-2</b>
<b>Window Type:</b>	<b>SFB 52</b>
<b>Sound Insulation R<sub>w,P</sub></b>	<b>52 dB</b>
<b>Structural Opening:</b>	<b>.... x .... mm</b>
<b>Frame:</b>	4-sided circumferential rebated, one-piece encasing frame adapted to the wall thickness with clip-in glazing beads on both sides. Without edge damping, therefore smooth visible area between the glazing with black coating. On request, the visible area between the glazing can also be coated in other RAL colours.
<b>Glazing:</b>	Two acoustically separated, vertically mounted individual panes of laminated safety glass fixed in the frame in a double-sided foam rubber bed.
<b>Surface:</b>	Frame and glazing beads galvanized and coated with 2K-PUR primer (Very High Solid) similar to RAL 7035.

## Supplementary Equipment

**Glazing Types:**

Installation of non-reflective glass  
Installation of white glass

**Edge Damping:**


Individual full-surface edge damping adapted to the wall thickness made out of black coated perforated sheet with mineral fibre lining. The edge damping is fixed invisibly in the frame so that no visually disturbing elements affect the uniform appearance of the edge damping. On request, the edge damping can also be coated in other RAL colours.

**Note:**

Edge damping is not required to achieve sound insulation  $R_{w,P} 52$  dB.

**BUCHELE DELUXE:**

The exclusive surface coating.

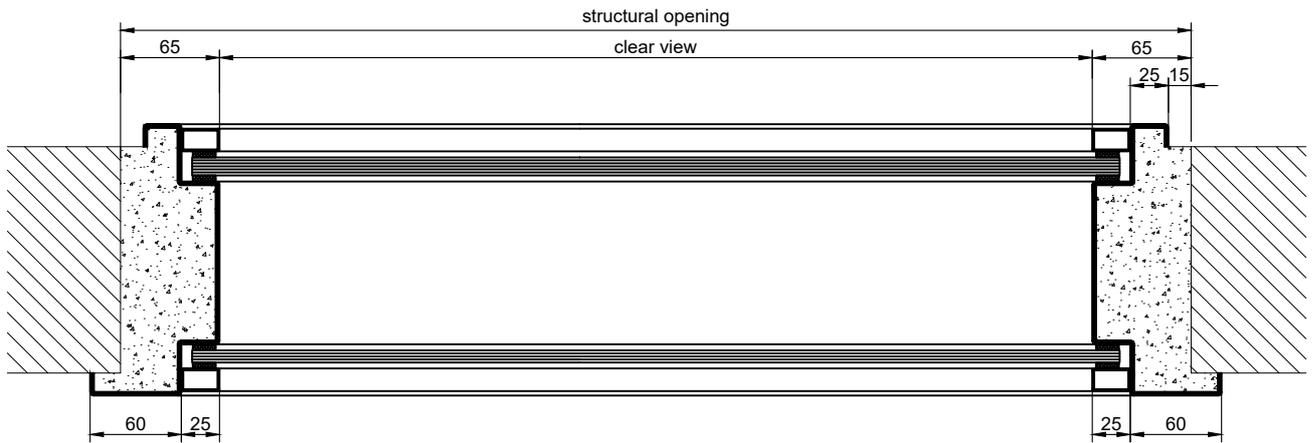

encasing frame

block frame

2-part encasing frame

