

## Double Leaf PLANE Line Bullet Resistant Security Door

<b>Bullet Resistance</b>	<b>7000 J FB4/FB6/FB7</b>	<b>acc. to shooting range guideline tested acc. to EN 1522</b>
--------------------------	-------------------------------	--

### Optional Audited Additional Functions

- Sound Insulation	up to $R_{w,P}$ 46dB	tested acc. to EN ISO 10140-2
- Burglar Protection	RC2/ RC3/ RC4/ RC5	tested acc. to EN 1627
- Air Tight	up to class 4	tested acc. to EN 1026
- Rain- and Fire-Water Tight	class 6A	tested acc. to EN 1027
- Wind load Resistance	up to class C5	tested acc. to EN 12211
- Blast Resistance	up to 20 kPa	
- Explosion Protection	up to zone 1/21	acc. to EN 1127-1 or ATEX 2014/34/EU
- Stainless Steel		

### Range of Dimension

Width from 1000 mm to 3000 mm  
Height from 500 mm to 3000 mm

### Technical Specification and Tender Text

<b>Product:</b>	<b>PL2 double leaf bullet resistant security door brand Buchele tested acc. to EN 1522</b>
<b>Door Type:</b>	<b>PLANE Line PL 2 BASIC</b>
<b>Bullet Resistance:</b>	<b>7000 J</b>
<b>Structural Opening:</b>	<b>.... x .... mm</b>
<b>Door Leaf:</b>	Double-walled, planar 70 mm thick steel door leaf without hinge embossing, three sides rebated with thick rebate. Special insulating inserts fully laid-in and glued. Passive leaf with multi-chamber sealing profile in the middle rebate. Securing pin screwed in door leaf rebate.
<b>Threshold:</b>	Floor bracket as separation sill. Surface galvanized and welded to the frame.
<b>Frame:</b>	3-sided circumferential rebated corner frame with high-quality multi chamber sealing profile adjustable fixed in the three-sided rebate.
<b>Hinges:</b>	Three-part, height adjustable construction hinges with hinge pin retention and ball bearing spacer ring for smooth door movement.
<b>Fitting:</b>	<b>Active leaf</b> with 2-point security mortise lock with latch lever function acc. to EN 12209 (prepared for installation of a profile cylinder lock, provided by customer). Door handle set in acc. to EN 1906 fixed pivoted stainless steel in U-shape with rounded long-plate. <b>Passive leaf</b> with concealed shoot bolt lock.
<b>Surface:</b>	Door leaf and frame galvanized und primed with 2K-PUR primer (Very High Solid) similar RAL 7035.

### Alternative: PLANE Line PL 2 PREMIUM with flush mounted optics

- Frame:** 3-sided circumferential rebated PLANE Line special corner frame for flush mounted optics on hinge side.  
With high-quality multi-chamber sealing profile adjustable fixed in the three-sided groove.
- Hinges:** Object hinges type VB-3D 160 adjustable in three dimensions.  
Fixture element with slide bearings inside for smooth door movement.




### Alternativ: PLANE Line PL 2 SUPERIOR mit flächenbündiger Optik

- Frame:** 3-sided circumferential rebated PLANE Line special corner frame for flush mounted optics on hinge side.  
With high-quality multi-chamber sealing profile adjustable fixed in the three-sided groove.
- Hinges:** Concealed hinge system adjustable in three dimensions.

### Supplementary Equipment


- Bullet Splash:** Fully glued onto the door leaf and frame.  
Sliding hatch to protect the door handle on the shooting lane side.
- Stainless Steel:** Material 1.4301 (V2A) or 1.4404 (V4A),  
Surface mill finish or brushed.
- BUCHELE DELUXE:** The exclusive surface coating.

### BASIC - Version

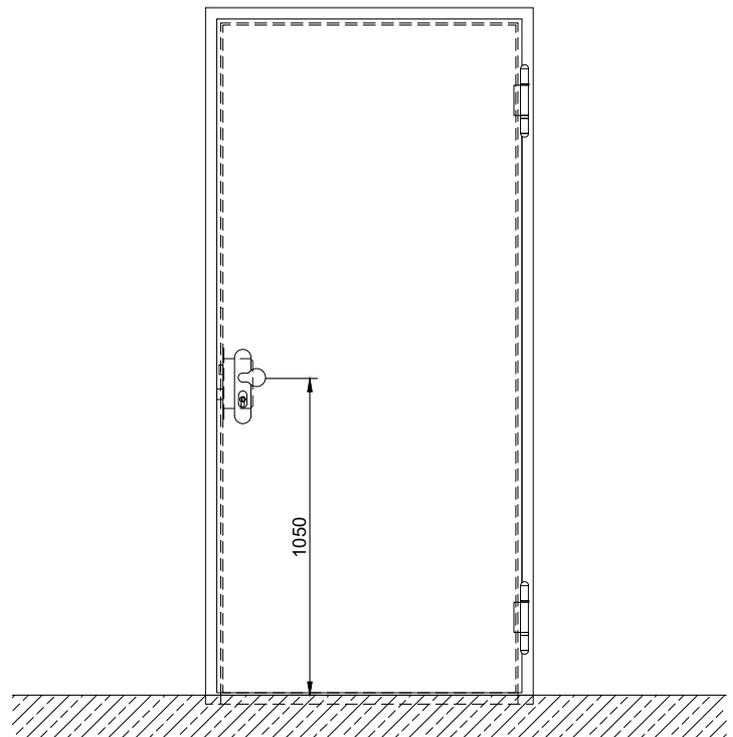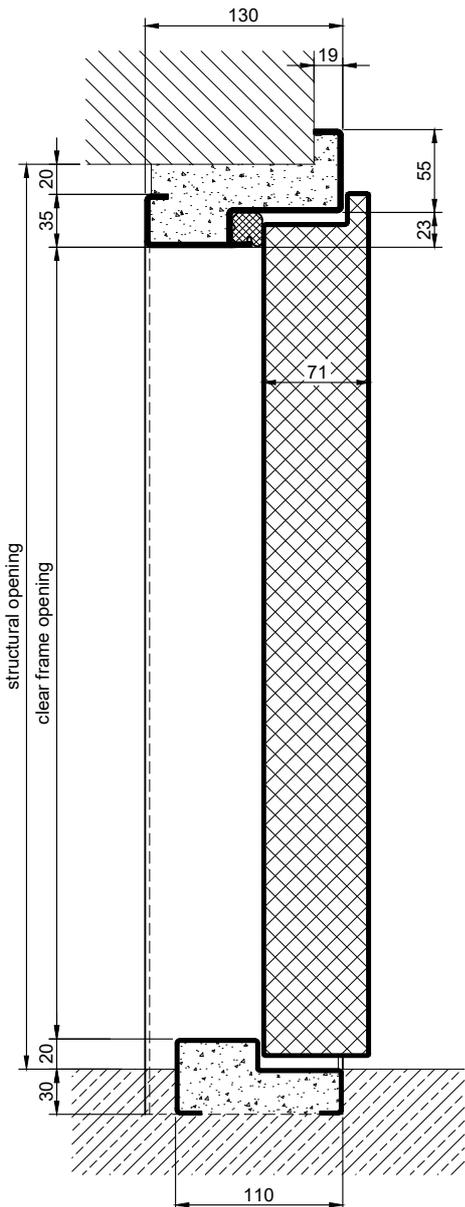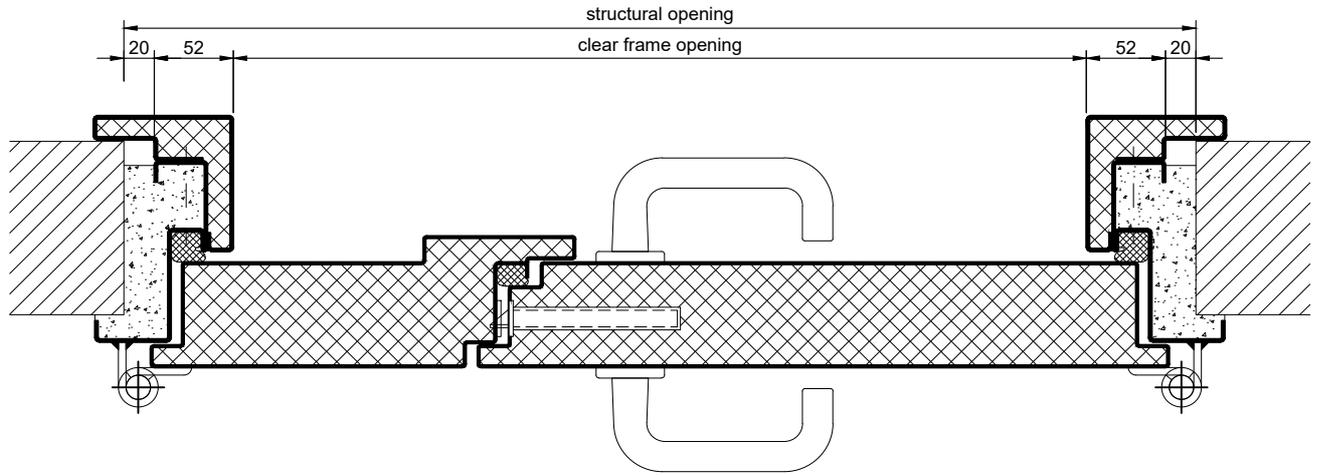

### PREMIUM - Version


construction hinges

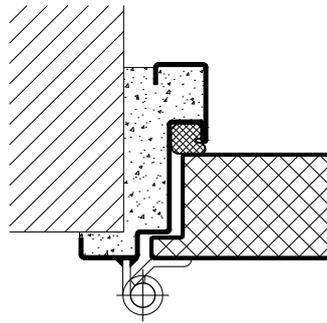

### Thresholds


separation sill

information:  
With this version there is **NO** bullet resistance in the threshold area!

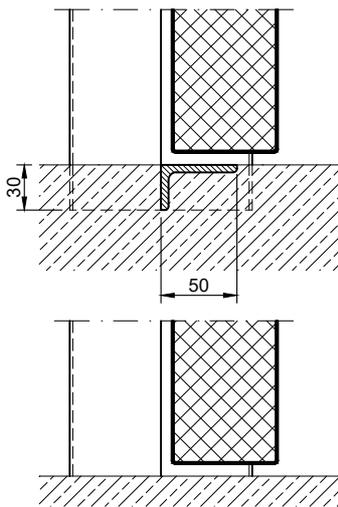


drop seal


information:  
With this version there is **NO** bullet resistance in the threshold area!

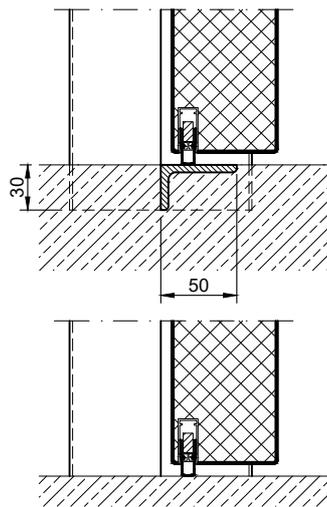


stop sill without seal

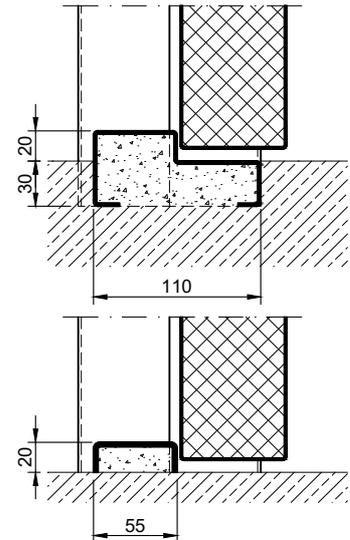

stop sill with drop seal

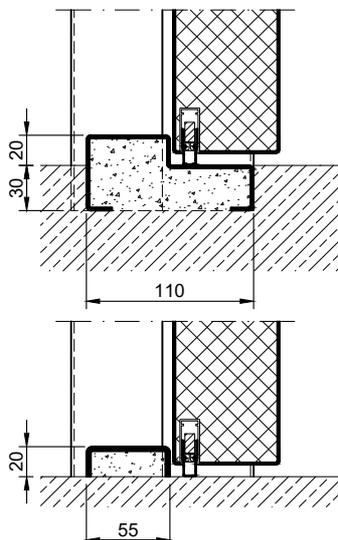

stop sill with seal

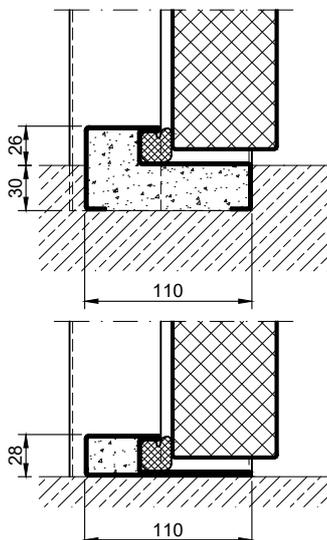

full sill

